



4 SPEED TRANS.
P.T.O. OPENING SAE STD. LARGE ON R.H. SIDE
GEAR TRANS. DRIVE 36T-7P-22 1/2" R.A.
SPEED RATIO: 395 R.P.M. TO 1000 R.P.M. (ENG)
ROTATION: OPPOSITE ENGINE
ENGINE SPEED GOVERNED AT 3000 R.P.M.

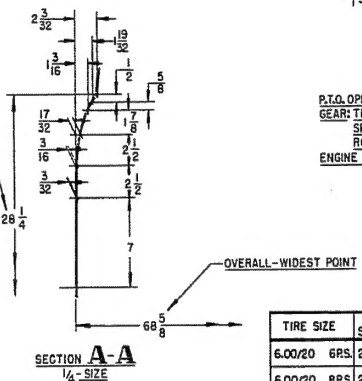

TIRE SIZE	RIM SIZE	A	B	C	D	E	F	G	H	J	K	P
6.00/20	6RS. 20X5	63 1/2	—	—	—	—	—	—	—	—	—	—
6.00/20	8RS. 20X5	63 1/2	—	—	—	—	—	—	—	—	—	—
6.50/20	6RS. 20X5	63 1/2	55 9/16	24.28	—	—	—	—	—	10.00	16J2	—
6.50/20	8RS. 20X5	63 1/2	55 9/16	24.28	—	—	—	—	—	10.00	16J2	—
7.00/20	6RS. 20X5	63 1/2	55 9/16	24.03	—	—	—	—	—	10.73	16J0	—
7.00/20	8RS. 20X5	63 1/2	55 9/16	24.03	—	—	—	—	—	10.73	16J0	—
7.50/20	6RS. 20X6	62	62 5/16	26.96	—	—	—	—	—	11.28	17J2	—
7.50/20	8RS. 20X6	62	62 5/16	26.96	—	—	—	—	—	11.28	17J0	—
8.25/20	10RS. 20X6	—	62 5/16	26.69	—	—	—	—	—	11.93	18J0	—
6.00/20	6RD. 20X5	—	65 1/16	9 1/2	24.71	3.36	3	9.33	15.64	80.70	—	—
6.00/20	8RD. 20X5	—	65 1/16	9 1/2	24.71	3.36	3	9.33	15.75	80.70	—	—
6.50/20	6RD. 20X5	—	65 1/16	9 1/2	24.28	2.50	3	10.00	16J2	81.56	—	—
6.50/20	8RD. 20X5	—	65 1/16	9 1/2	24.28	2.50	3	10.04	16J2	81.56	—	—
7.00/20	6RD. 20X5	—	65 1/16	9 1/2	24.03	2.00	4	10.73	16J0	82.06	—	—
7.00/20	8RD. 20X5	—	65 1/16	9 1/2	24.03	2.00	4	10.73	16J0	82.06	—	—
7.50/20	6RD. 20X6	—	65 1/16	11	21.84	2.60	4	11.28	17J2	85.45	—	—
7.50/20	8RD. 20X6	—	65 1/16	11	21.84	2.60	4	11.93	17J0	85.45	—	—
8.25/20	10RD. 20X6	—	68 1/16	11	24.07	2.07	4	11.81	18J0	88.00	—	—

NOTE: ABOVE CHART FOR HYPOID AXLE ON 14500* G.W.M.
FOR 14500* G.W.M. 2-SPEED AXLE
FOR 15500* G.W.M. 2-SPEED AXLE
ADD 3 TO D.B.P. & ADD 1/2 TO F.

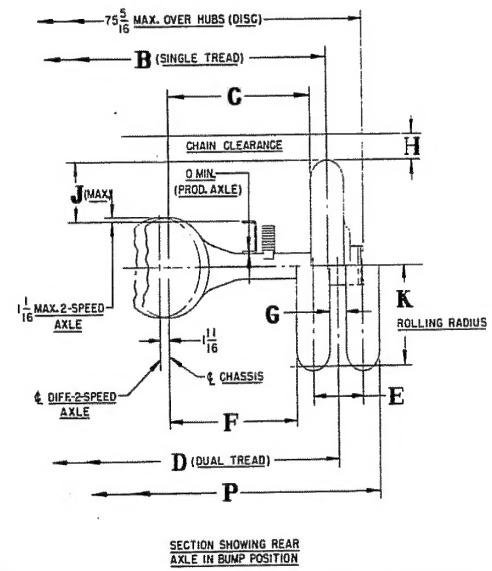

FRONT SPRINGS

M	LOAD LBS.	RATE LBS. PER SPRG.	SPRING NO.
10 7/8	1300	517	1262731
11 1/4	1600	634	1262733
11 3/8	1900	742	1262735

REAR SPRINGS - LESS AUX.

L	LOAD LBS.	RATE LBS. PER SPRG.	SPRING NO.
11 5/8	2000	525	591655
12 1/8	3300	975	591654
12 1/8	3800	1125	591656
12 1/8	4500	1325	591657

REAR SPRINGS - WITH AUX.

L	LOAD LBS.	RATE LBS. PER SPRG.	SPRING NO.
11 5/8	3100	1830	591655 MAIN
11 5/8	UP TO 1550	325	915812 AUX.
12 1/8	4400	2260	591654 MAIN
12 1/8	UP TO 2480	975	915812 AUX.
12 1/8	4900	2430	591656 MAIN
12 1/8	UP TO 2850	1125	915812 AUX.
12 1/8	5600	2630	591657 MAIN
12 1/8	UP TO 3380	1325	915812 AUX.

BODY BUILDERS LAYOUT
F, FA, H, HA, 128", 152", 170", 192" W.B.